



E6 380

缠绕&编织用直接无捻粗纱

Direct Roving for Filament Winding&Weaving

产品说明 Product Description

380 为无碱直接无捻粗纱，采用 E6 玻璃配方，表面涂覆硅烷基浸润剂，专为增强环氧树脂而设计，可适用于胺类或酸酐类固化体系。主要适用于单、双或多轴向织物的织造。

380 产品适用于真空辅助树脂灌注成型工艺制造大型风力发电叶片。
The 380-E6 Direct Roving is based on E6 glass formulation and coated with a silane-based sizing. It is specifically designed to reinforce both amine and anhydride cured epoxy resins for producing UD, biaxial, and multiaxial woven fabrics.

380-E6 is suitable for use in the vacuum-assisted resin infusion process to make large wind blades.



产品特点 Product Features

- ◎ 与环氧树脂结合性好
- ◎ 浸透、浸穿速度快，终态效果均一、完全
- ◎ 纱耐磨性好，毛羽少
- ◎ 制品的机械性能优越
- ◎ 优异的耐酸腐蚀性
- Good bonding with epoxy resin
- Fast, uniform and complete wet-out and wet-through
- Good abrasion resistance and low fuzz
- Excellent mechanical properties
- Excellent acid corrosion resistance

规格代号 Specification

玻璃类型 Glass type	E6			
浸润剂类型 Sizing type	硅烷 Silane			
典型纤维直径 Typical filament diameter (μm)	13	16	17	24
典型线密度 Typical linear density (tex)	300	200	600 1200 2400	4800
示例 Example	E6DR17-2400-380			

技术指标 Technical Parameters

项目 Item	线密度偏差 Linear density variation (%)	含水率 Moisture content (%)	可燃物含量 Sizing content (%)	断裂强度 Breakage strength (N/tex)
检测方法 Test method	ISO 1889	ISO 3344	ISO 1887	ISO 3341
指标 Standard range	± 5 (< 600 tex) ± 4 (≥ 600 tex)	≤ 0.07	0.55 ± 0.15	≥ 0.40

机械性能 Mechanical Properties

机械性能 Mechanical properties	单位 Unit	实验值 Value	树脂 Resin	测试方法 Test method
拉伸强度 Tensile strength	MPa	2612	EP	ASTM D2343
拉伸模量 Tensile modulus	GPa	81.15	EP	ASTM D2343
剪切强度 Shear strength	MPa	73.0	EP	ASTM D2344
强度保留率(72小时水煮) Strength retention(72 hr boiling)	%	> 95	EP	/

以上数据为实验室针对E6DR17-2400-380产品的具体实验值，仅供参考。
The above data are actual experimental values for E6DR17-2400-380 and to be used for reference only.

使用说明 Instructions

- ◎ 本产品在12个月内使用最佳，使用前应保存在原包装内。
- ◎ 产品使用时注意防护，避免产品擦毛、损伤等情况。
- The product is best used within 12 months after production, and should be kept in the original package before use.
- Care should be taken when using the product to prevent it from being scratched or damaged.



E6 380

缠绕&编织用直接无捻粗纱

Direct Roving for Filament Winding&Weaving

使用说明 Instructions

- ◎ 使用前调理纱线的温湿度与环境温湿度平衡，使用时对环境温湿度进行适当控制。
- ◎ 使用时请合理控制张力并保证张力均匀性。

·The temperature and humidity of the product should be conditioned to be close or equal to the ambient temperature and humidity before use, and the ambient temperature and humidity should be properly controlled during the use.

·When using the product, please control the tension properly and ensure the tension uniformity.


包装信息 Packaging

项目Item	单位unit	指标Standard			
典型包装方式 Typical packaging method	/	采用托盘包装 Packed on pallets.			
典型纱团高度 Typical package height	mm (in)	260 (10.2)			
纱团内径 Package inner diameter	mm (in)	160 (6.3)			
典型纱团外径 Typical package outer diameter	mm (in)	280 (11.0)		310 (12.2)	
典型纱团重量 Typical package weight	kg (lb)	17 (37.5)		22 (48.5)	
层数 Number of layers	层 (layer)	3	4	3	4
每层纱团个数 Number of packages per layer	个 (pcs)	16		12	
每托纱团个数 Number of packages per pallet	个 (pcs)	48	64	36	48
每托重量 Net weight per pallet	kg (lb)	816 (1799.0)	1088 (2398.6)	792 (1746.1)	1056 (2328.1)
托盘长度 Pallet length	mm (in)	1140 (44.9)		1270 (50.0)	
托盘宽度 Pallet width	mm (in)	1140 (44.9)		960 (37.8)	
托盘高度 Pallet height	mm (in)	940 (37.0)	1200 (47.2)	940 (37.0)	1200 (47.2)

贮存 Storage

在没有特殊要求的情况下，玻璃纤维产品应贮存在干燥、阴凉的地方，防止受潮。最佳存储条件为温度 -10°C ~ 35°C，相对湿度≤80%。为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上面的托盘。

Unless otherwise specified, the fiberglass products should be stored in a dry, cool and moisture proof area. The best temperature and humidity should be maintained at -10°C ~35°C and ≤80% respectively. To ensure safety and avoid damage to the product, the pallets should be stacked not more than three layers high. When the pallets are stacked in two or three layers, special care should be taken to correctly and smoothly move the upper pallet.

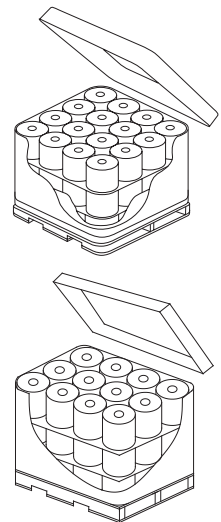

安徽天复新材料有限公司 ANHUI TIANFU NEW MATERIAL CO.,LTD

Copyright 2024 安徽天复新材料有限公司

Add: Room 1716, Lvdi Building, Qianshan Road, Zhengwu District, Hefei City, Anhui Province, China

Tel/WhatsApp/Skype: +86 13696771864

Email: sales@tfcomposite.com

Website: www.tfcomposite.com